



X500 FULLY RUGGED NOTEBOOK


- Processore Intel® Core™ i7-7820EQ
- LCD TFT 15,6" FHD con display QuadraClear® Getac leggibile alla luce del sole
- NVIDIA® Quadro® P2000 4GB discrete graphic controller opzionale
- Unità alloggiamento multimediale ed espansione PCI / PCIe 3.0



PCI / PCI-Express 3.0
Expansion Unit



Multimedia Bay
2nd Storage

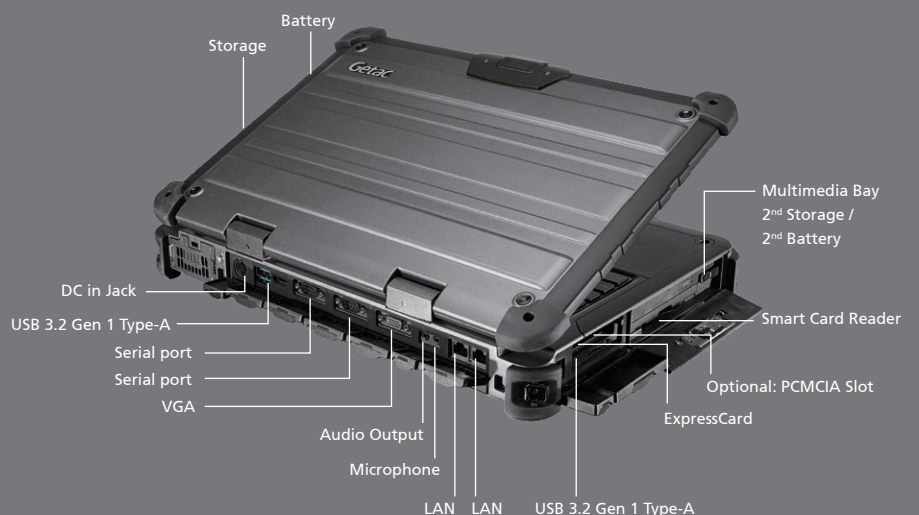

Specifications

Generation

G3

Operating System

Windows 10 Pro

Mobile Computing Platform

Intel® Core™ i5-7440EQ 2.9GHz

Max. 3.6GHz

- 6MB Intel® Smart Cache

Platform Options:

Intel® Core™ i7-7820EQ 3.0GHz

Max. 3.7GHz

- 8MB Intel® Smart Cache

VGA Controller

Intel® HD Graphics 630

Optional: NVIDIA® GeForce® GTX1050 4GB

discrete graphic controller

Optional: NVIDIA® Quadro® P2000 4GB discrete graphic controller

Display

15.6" TFT LCD FHD (1920 x 1080)

Protection film

1000 nits QuadraClear® sunlight readable display

Optional: Resistive touch screen

Storage & Memory

8GB DDR4

Optional: 16GB / 32GB / 64GB DDR4ⁱ

500GB SATA HDD / 512GB SATA SSD

Optional: 1TB SATA HDD / 1TB SATA SSD

Keyboard

LED backlit membrane keyboard with integrated numeric keypad

Optional: LED backlit rubber keyboard

Pointing Device

Touchscreen

- Optional: Pressure sensitive touchscreen

Touchpad

- Glide touchpad with scroll bar

Expansion Slot

Smart Card Reader x 1

ExpressCard / 54 x 1

Optional: PCMCIA Type II x 1

Multimedia Bay

DVD super multi drive

Optional 2nd storage: 500GB HDD / 1TB HDD /

512GB SSD / 1TB SSD

Optional 2nd battery: 10.8V, 9240mAh, 99.8Wh

I/O Interface

Microphone (Mini-jack) x 1

Audio output (Mini-jack) x 1

DC in Jack x 1

USB 3.2 Gen 1 Type-A x 4

LAN (RJ45) x 2

HDMI x 1

Docking connector x 1

External VGA (15-pin; D-sub) x 1

Serial port (9-pin; D-sub) x 2

Optional: FHD webcam x 1

Optional: RF antenna pass-through for GPS^j,

WLAN and WWAN

Communication Interface

10/100/1000 base-T Ethernet

Intel® Dual Band Wireless-AC 8265, 802.11ac

Bluetooth® (v4.2)ⁱⁱⁱ

Optional: Dedicated GPS

Security Feature

TPM 2.0

Kensington Lock

Intel® vPro™ Technology

Smart Card reader

Power

AC Adapter (150W, 100-240VAC, 50/60Hz)

Li-Ion smart battery (10.8V, 9240mAh, 99.8Wh)

Optional: Multimedia Bay 2nd Li-Ion smart battery

(10.8V, 9240mAh, 99.8Wh)

Dimension (W x D x H) & Weight

410 x 320 x 65mm (16.1" x 12.6" x 2.5")

5.2kg (11.4lbs)^{iv}

Rugged Feature

MIL-STD-810H certified

IP65 certified

MIL-STD-461G certified^v

Vibration & drop resistant

Full magnesium alloy case

Shock-protected removable HDD

Optional: ANSI / UL 121201, CSA C22.2 NO. 213^{vi}

Environmental Specification

Temperature^{vii}:

- Operating: -20°C to 55°C / -4°F to 131°F

- Storage: -40°C to 71°C / -40°F to 160°F

Humidity:

- 95% RH, non-condensing

Pre-installed Software

Getac Utility

Getac Geolocation

Optional: Absolute Persistence®

Accessories

Battery (10.8V, 9240mAh, 99.8Wh)

AC Adapter (150W, 100-240VAC)

Optional:

Backpack

Battery (10.8V, 9240mAh, 99.8Wh)

Multimedia Bay 2nd HDD

Multimedia Bay 2nd Battery (10.8V, 9240mAh,

99.8Wh)

Multi-Bay Charger (Dual Bay)

AC Adapter (150W, 100-240VAC)

Office Dock AC Adapter (150W, 100-240VAC)

MIL-STD-461 Certified AC Adapter (150W,

100-240VAC)

Stylus

Protection Film

PCI or PCI-Express 3.0 Expansion Unit (x 2 slots)^{viii}

Vehicle Dock^{viii}

Office Dock

Bumper-to-Bumper Warranty

Gli imprevisti possono compromettere l'utilizzo dei dispositivi e causare tempi di inattività.

Ecco perché Getac ha introdotto la copertura dei danni accidentali come elemento standard della Garanzia totale Bumper-to-Bumper, consentendo una migliore gestione dei costi legati all'IT.

La Garanzia totale è una formula agevole che offre il servizio di logistica Pack & Collect e garantisce un servizio di assistenza e riparazione rapido, effettuato da personale qualificato di Getac e di una riconsegna altrettanto veloce.

In questo modo il dispositivo sarà nuovamente operativo nel giro di pochi giorni.

Standard

3 anni Garanzia totale Bumper-to-Bumper

- i Share memory size may vary by different operating system and RAM size.
- ii Optional RF antenna pass-through for GPS, PCI or PCI-Express Expansion Unit are mutually exclusive options.
- iii Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- iv Weight and dimensions vary from configurations and optional accessories. Depth including hard handle.
- v MIL-STD-461G 150W AC adapter sold separately.
- vi PCI or PCI-Express 3.0 Expansion Unit is not available with ANSI / UL 121201, CSA C22.2 NO. 213 configurations.
- vii Tested by an independent third-party test lab following MIL-STD-810H.
- viii PCI or PCI-Express 3.0 Expansion unit is not compatible with vehicle dock.

X500

Fully Rugged Notebook



Docking Solutions

	Vehicle Dock	Office Dock
Serial Port	2	1
External VGA	1	1
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	USB 2.0 x 4	USB 3.0 x 2 USB 2.0 x 2
LAN	1	1
RF Antenna Connector	3 (optional)	--

Getac

GETAC ITALIA

Via Paracelso 26, Centro Direzionale Colleoni,
Palazzo Cassiopea 3 20864 Agrate Brianza (MB)

Tel: +39 039 8901584

Sales-getac-Italy@getac.com | www.getac.com/it/



Copyright © 2021 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.
Le informazioni riportate sono puramente indicative,
Le specifiche disponibili sono da verificare al momento dell'offerta. V01M05Y21T